

TO GET YOUR NETWORK CONNECTED



G703 75/120 Ohm Balun
Type Dual 1.6/5.6 Female RJ45
Part Number: E10110D
2 and 8 Mbps Version



G703 75/120 Ohm Balun
Type Dual 1.6/5.6 Male RJ45
Part Number: E10130D
2 and 8 Mbps Version



G703 75/120 Ohm Balun
Type Dual BNC Male RJ45
Part Number: E10140D
2 and 8 Mbps Version



Rear View Balun

EQL Telecommunications
Unit 20, 13 Swaffham Road
Minto NSW 2566
Australia

Postal Address:
P.O.Box 351
Minto NSW 2566
Australia

Tel: +61 2 9824 5680
Fax: +61 2 9824 5685
Email: sales@eql.com.au
Web: www.eql.com.au

ABN: 93 098 402 218

Description:

Module, 1 Balun with 2 1.6/5.6 Female Coaxial Connector to 1 RJ45,

- Offers two E1 or T1 (2Mbps or 1.5 Mbps) paths into 1 Shielded RJ45 socket from 1.6/5.6 Female. Can also be used for E2 and T2 applications.
- Provides electrical isolation of 1KV from input to output terminals.
- Housed in an insulated ABS container.
- Impedance 75 to 120 Ohm
- Stable over working temperature of -5°C to $+55^{\circ}\text{C}$

Typical Specifications:

- Data Speed: Up to 8 Mbps
- Insertion Loss: Less than 0.4 dB in band 51 KHz to 3.072 MHz
- Return Loss: Better than 25 dB from 51 KHz to 3.072 MHz for each channel
- Cross Talk: Better than 60 dB from 51 KHz to 3.072 MHz
- Pulse Shape: Meets ITU-T G.703 Mask

Physical Characteristics

- The mechanical endurance of the coaxial connectors are designed to give in excess of 200 connect/disconnect cycles.


Materials

- 1.6/5.6 Connector Body: Brass
- Center Contact: Phosphor Bronze
- Insulator: PTFE
- RJ45 Socket: Shielded
- Balun Housing: ABS UL 94-V0


Finish

- Gold
- Gold
- Black


Typical Test Results




Return Loss



Pulse Shape

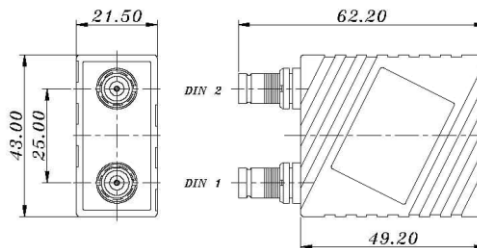

Outline Drawing



Schematic Diagram

Note: Specifications subject to change without notice.